


Type of container

20' Insulated

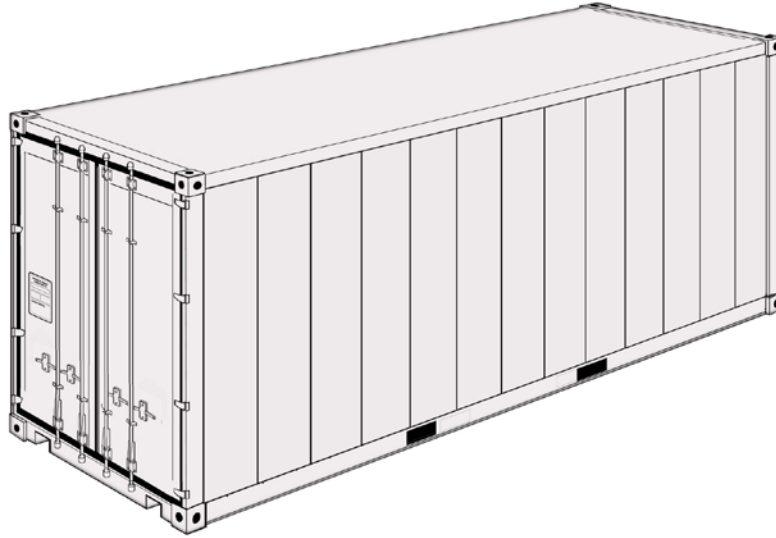

Details

- used for temperature-sensitive goods
- insulated panels, roof and doors
- does not have a built in refrigeration unit
- can not heat or cool themselves but retain the temperature of the cargo for a specific length of time

Outside dimensions

length	mm	6058
	ft	19' 10 1/2"
width	mm	2438
	ft	8'
height	mm	2591
	ft	8' 6"

Roof opening

width	mm	./.
	ft	./.
height	mm	./.
	ft	./.

Inside dimensions

length	mm	5824
	ft	19' 1 9/32"
width	mm	2292
	ft	7' 6 15/64"
height	mm	2278
	ft	7' 5 43/64"
capacity	cbm	30.4
	cbft	1075

Weights

Tare	kg	2500
	pd	5510
Max. payload	kg	27980
	pd	61690
Max. Gross	kg	30480
	pd	67200

Door opening

width	mm	2292
	ft	7' 6 15/64"
height	mm	2265
	ft	7' 5 11/64"
width side door	mm	./.
	ft	./.
height side door	mm	./.
	ft	./.

Certification

ISO size type	22H5
ISO size group	22HI