


Type of container

20' Open Top

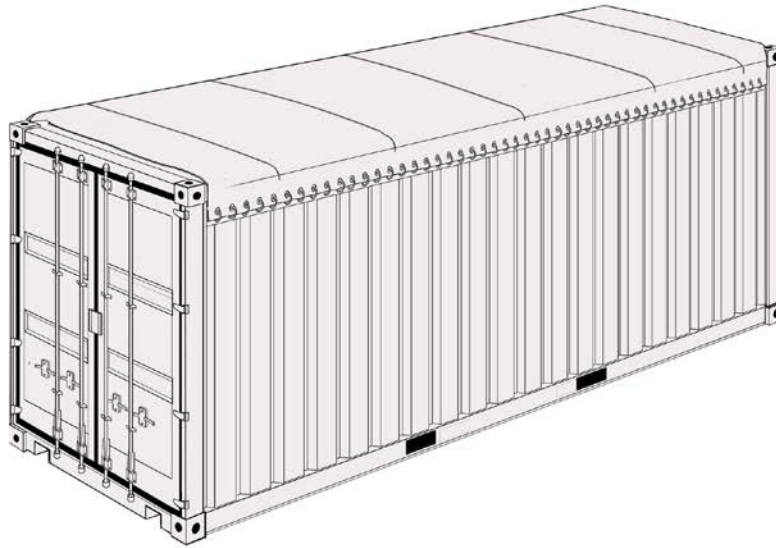

Details

- specifically designed to carry heavy cargo that is best loaded from above or for cargo that exceeds the height of the container commonly known as "out of gauge"
- removable tarpaulin, removable roof bows
- roof opening may vary depending on type of construction
- some models also have a swinging header (rear top rail) to facilitate easier loading operations

Outside dimensions

length	mm	6058
	ft	19' 10 1/2"
width	mm	2438
	ft	8'
height	mm	2591
	ft	8' 6"

Roof opening

width	mm	5415
	ft	17' 9 1/8"
height	mm	2205
	ft	7' 2 3/4"

Inside dimensions

length	mm	5888
	ft	19' 3 3/4"
width	mm	2345
	ft	7' 8 1/8"
height	mm	2315
	ft	7' 7 1/8"
capacity	cbm	32
	cbft	1130

Weights

Tare	kg	2250
	pd	4960
Max. payload	kg	28230
	pd	62240
Max. Gross	kg	30480
	pd	67200

Door opening

width	mm	2335
	ft	7' 8"
height	mm	2280
	ft	7' 5 3/4"
width side door	mm	./.
	ft	./.
height side door	mm	./.
	ft	./.

Certification

ISO size type	22U1
ISO size group	22UT