
## 20' Platform



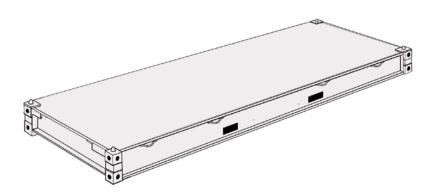

## **Details**

- mainly used to carry goods which, because of their dimensions or weight, cannot be carried in a closed container
- suitable for extremely heavy-duty
- cargo is secured via different lashing bars on the outside profile of the bottom side rail

Outside demensions			
length	mm	6058	
	ft	19' 10 1/2''	
width	mm	2438	
	ft	8'	
height	mm	370	
	ft	1' 2 9/16''	

Roof opening	
width	mm ./.
	ft ./.
height	mm ./.
	ft ./.

Inside dimensions		
length	mm	./.
	ft	./.
width	mm	./.
	ft	./.
height	mm	./.
	ft	./.
capacity	cbm	./.
	cbft	./.

Weights		
Tare	kg	2520
	pd	5560
Max. payload	kg	27960
	pd	61640
Max. Gross	kg	30480
	pd	67200

Door opening		
width	mm	./.
	ft	./.
height	mm	./.
	ft	./.
width side door	mm	./.
	ft	./.
height side door	mm	./.
	ft	./.

Certification	
ISO size type	22P0
ISO size group	22PL