


## Type of container

# 40' Insulated

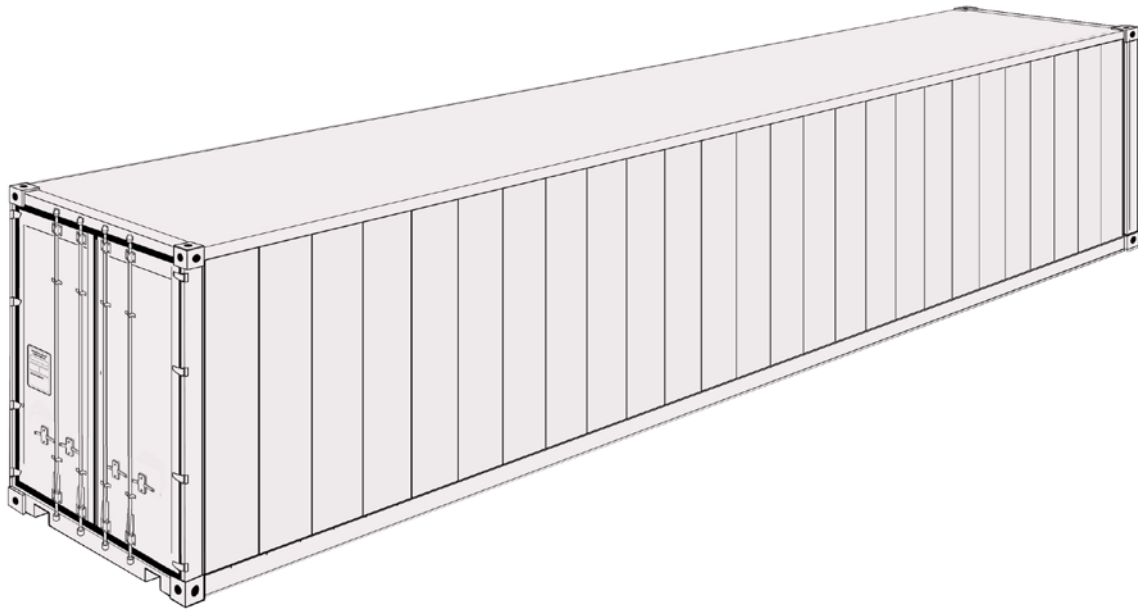

### Details

- used for temperature-sensitive goods
- insulated panels, roof and doors
- does not have a built in refrigeration unit
- can not heat or cool themselves but retain the temperature of the cargo for a specific length of time

#### Outside dimensions

length	mm	12192
	ft	40'
width	mm	2438
	ft	8'
height	mm	2591
	ft	8' 6"

#### Roof opening

width	mm	./.
	ft	./.
height	mm	./.
	ft	./.

#### Inside dimensions

length	mm	11958
	ft	39' 2 25/32"
width	mm	2254
	ft	7' 6 15/64"
height	mm	2278
	ft	7' 5 43/64"
capacity	cbm	61.4
	cbft	2169

#### Weights

Tare	kg	3800
	pd	8118
Max. payload	kg	26680
	pd	59082
Max. Gross	kg	30480
	pd	67200

#### Door opening

width	mm	2292
	ft	7' 6 15/64"
height	mm	2265
	ft	7' 5 11/64"
width side door	mm	./.
	ft	./.
height side door	mm	./.
	ft	./.

#### Certification

ISO size type	42H5
ISO size group	42HI